


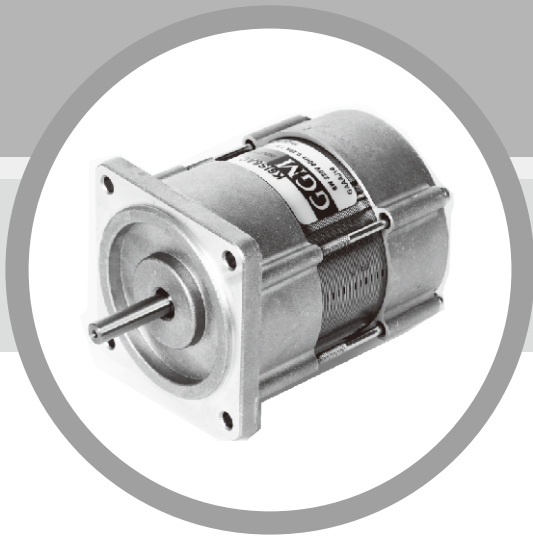

OPEN MOTORS


OPEN TYPE MOTOR

6W


□60mm

LEAD WIRE TYPE

DIMENSIONS

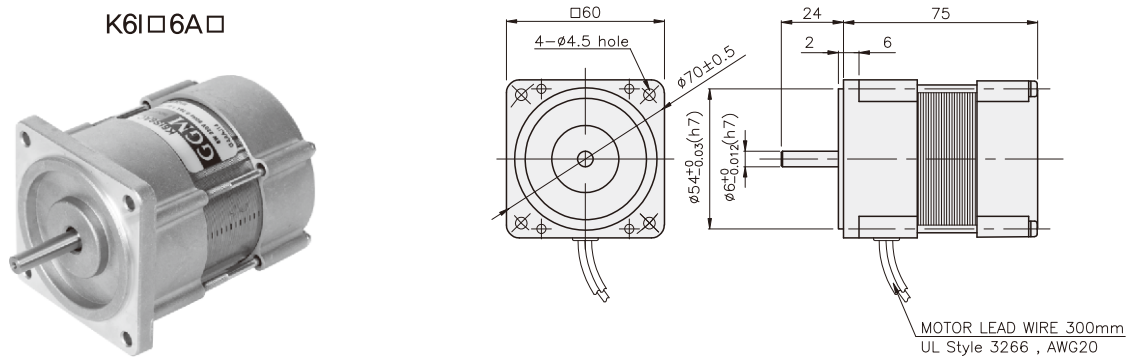

CONNECTION DIAGRAMS

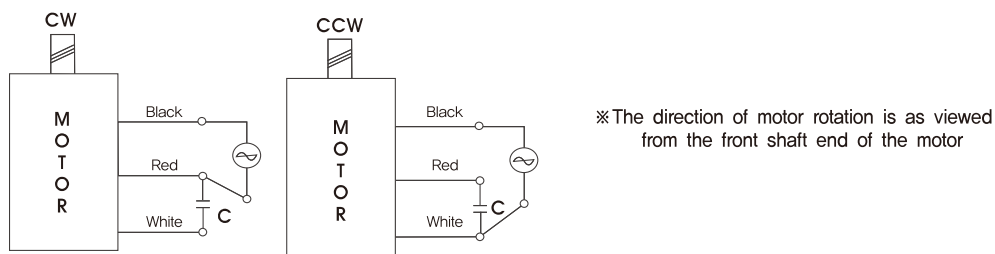

SPECIFICATIONS

6W continuous rating, four poles

Model		Voltage (V)	Frequency (Hz)	Current (A)	Start T. (N·m/kgf·cm)	Rated T. (N·m/kgf·cm)	Speed (rpm)	Condenser (μF)
K6I□6AJ	single-phase	100	50	0.25	0.04/0.4	0.049/0.49	1200	3
			60	0.23		0.04/0.4	1500	
K6I□6AU		110	60	0.18	0.035/0.35	0.04/0.4	1500	2
		115		0.19	0.04/0.4			
K6I□6AL		200	50	0.11	0.045/0.45	0.049/0.49	1200	0.8
			60			0.04/0.4	1500	
K6I□6AC		220	50	0.11	0.04/0.4	0.047/0.47	1250	0.6
			60	0.1	0.035/0.35	0.04/0.4	1500	
		230	50	0.12	0.045/0.45	0.047/0.47	1250	
			60	0.11	0.04/0.4	0.04/0.4	1500	
K6I□6AD		240	50	0.12	0.045/0.45	0.047/0.47	1250	0.5

Motor spec is same as induction motor's, Applied gear head is K6G□B(C) Series.
Identify rated torque of gearhead in induction motor in order to find out the torque value of gearhead per gear ratios.
* □ : SHAFT SHAPE (S : STRAIGHT, G : PINION)


OPEN TYPE MOTOR

25W


□80mm

LEAD WIRE TYPE

DIMENSIONS

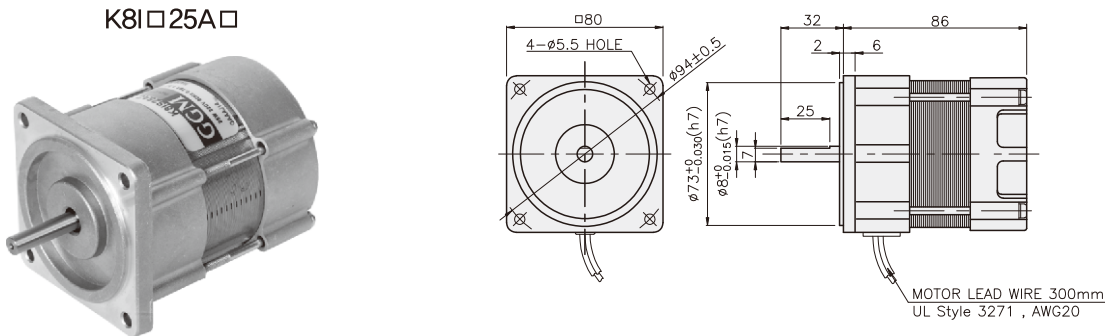

CONNECTION DIAGRAMS

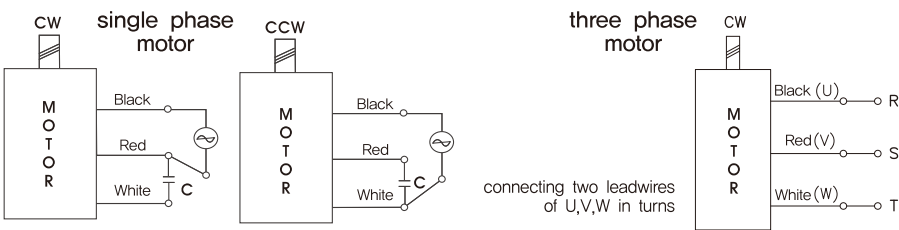

※The direction of motor rotation is as viewed from the front shaft end of the motor

SPECIFICATIONS

25W continuous rating, four poles

Model		Voltage (V)	Frequency (Hz)	Current (A)	Start T. (N·m/kgf·cm)	Rated T. (N·m/kgf·cm)	Speed (rpm)	Condenser (μF)
K8I□25AJ	single-phase	100	50	0.59	0.11/1.1	0.195/1.95 0.16/1.6	1250	7
K8I□25AU			60	0.54			1550	
K8I□25AL		115	60	0.48	0.09/0.9 0.095/0.95	0.165/1.65	1500	5
K8I□25AC				0.5			1500	
K8I□25AD		200	50	0.26	0.115/1.15	0.195/1.95 0.16/1.6	1250	1.8
K8I□25AT			60	0.28			1550	
K8I□25AH		220	50	0.28	0.11/1.1	0.195/1.95 0.16/1.6	1250	1.5
K8I□25AM			60	0.25			1550	
K8I□25AV		230	50	0.29	0.12/1.2	0.195/1.95 0.16/1.6	1250	1.5
K8I□25AZ			60	0.26			1550	
K8I□25AD	three-phase	240	50	0.3	0.11/1.1	0.195/1.95	1250	1.2
K8I□25AT			60	0.27			1550	
K8I□25AH		220	50	0.27	0.5/5	0.19/1.9 0.16/1.6	1300	—
K8I□25AM			60	0.24			1550	
K8I□25AV		230	50	0.28	0.6/6	0.185/1.85 0.155/1.55	1350	—
K8I□25AZ			60	0.24			1600	
K8I□25AJ		380	50	0.29	0.65/6.5 0.52/5.2	0.185/1.85 0.155/1.55	1350	—
K8I□25AU			60	0.25			1600	
K8I□25AL		400	50	0.17	0.6/6	0.19/1.9 0.155/1.55	1300	—
K8I□25AC			60	0.14			1600	
K8I□25AD	three-phase	415	50	0.17	0.73/7.3	0.19/1.9 0.155/1.55	1300	—
K8I□25AE			60	0.15			1600	
K8I□25AF		440	50	0.13	0.55/5.5	0.19/1.9 0.155/1.55	1300	—
K8I□25AG			60	0.11			1600	
K8I□25AH		440	50	0.14	0.63/6.3	0.19/1.9 0.155/1.55	1300	—
K8I□25AI			60	0.12			1600	

Motor spec is same as induction motor's. Applied gear head is K6G□B(C) Series.
Identify rated torque of gearhead in induction motor in order to find out the torque value of gearhead per gear ratios.
* □ : SHAFT SHAPE (S : STRAIGHT, G : PINION)


OPEN TYPE MOTOR

40W


□80mm – 83MM

LEAD WIRE TYPE

DIMENSIONS

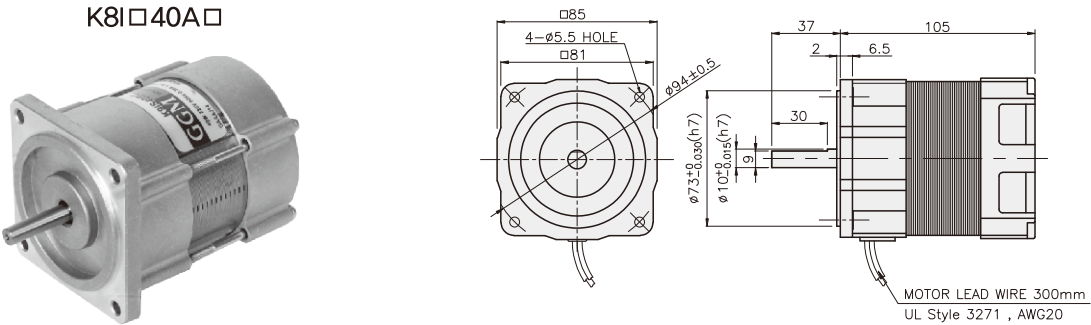

CONNECTION DIAGRAMS

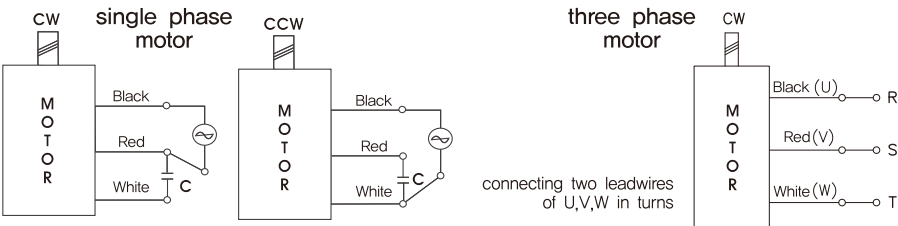

※ The direction of motor rotation is as viewed from the front shaft end of the motor

SPECIFICATIONS

40W continuous rating, four poles

Model		Voltage (V)	Frequency (Hz)	Current (A)	Start T. (N·m/kgf·cm)	Rated T. (N·m/kgf·cm)	Speed (rpm)	Condenser (μF)
K8I□40AJ	single-phase	100	50	0.86	0.21/2.1	0.315/3.15	1250	12
K8I□40AU			60	0.84	0.22/2.2	0.255/2.55	1550	
K8I□40AL		200	50	0.4	0.22/2.2	0.315/3.15	1250	3
K8I□40AC			60	0.41		0.255/2.55	1550	
K8I□40AD		240	50	0.38	0.24/2.4	0.315/3.15	1250	2.5
K8I□40AT			60	0.37		0.255/2.55	1550	
K8I□40AH		220	50	0.4	0.26/2.6	0.315/3.15	1250	2.5
K8I□40AM			60	0.38		0.255/2.55	1550	
K8I□40AV		400	50	0.37	0.2/2	0.3/3	1300	2
K8I□40AZ			60	0.37		0.3/3	1300	
K8I□40AT	three-phase	200	50	0.39	1/10	0.3/3	1300	—
K8I□40AH			60	0.32	0.78/7.8	0.245/2.45	1600	
K8I□40AM		220	50	0.33	0.95/9.5	0.29/2.9	1350	—
K8I□40AV			60	0.31	0.78/7.8	0.245/2.45	1600	
K8I□40AQ		230	50	0.41	1/10	0.29/2.9	1350	—
K8I□40AZ			60	0.32	0.83/8.3	0.245/2.45	1600	
K8I□40AJ		380	50	0.18	1/10	0.29/2.9	1350	—
K8I□40AU			60		0.78/7.8	0.245/2.45	1600	
K8I□40AL		400	50	0.18	1.15/11.5	0.29/2.9	1350	—
K8I□40AC			60	0.19	0.88/8.8	0.245/2.45	1600	
K8I□40AD		415	50	0.16	0.95/9.5	0.29/2.9	1350	—
K8I□40AE			60	0.14	0.72/7.2	0.245/2.45	1600	
K8I□40AF		440	50	0.19	1/10	0.29/2.9	1350	—
K8I□40AG			60	0.16	0.79/7.9	0.245/2.45	1600	

Motor spec is same as induction motor's, Applied gear head is K6G□B(C) Series.
Identify rated torque of gearhead in induction motor in order to find out the torque value of gearhead per gear ratios.
* □ : SHAFT SHAPE (S : STRAIGHT, G : PINION)


OPEN TYPE MOTOR

40W


□90mm

LEAD WIRE TYPE

DIMENSIONS

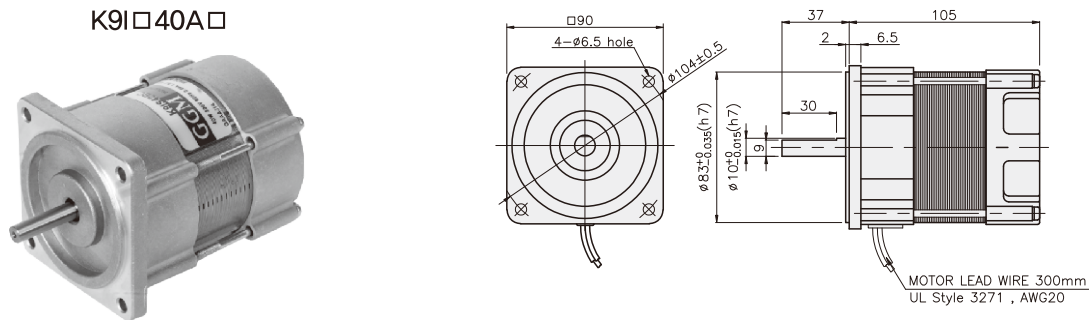

CONNECTION DIAGRAMS

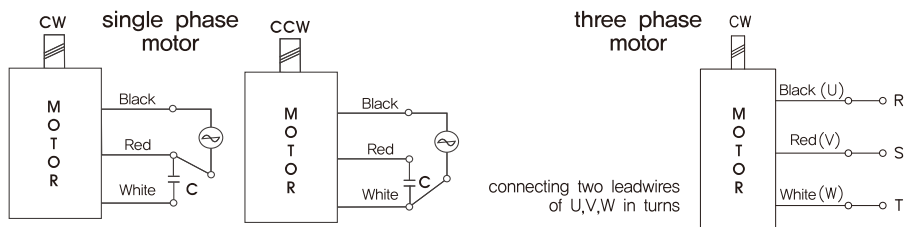

※The direction of motor rotation is as viewed from the front shaft end of the motor

SPECIFICATIONS

40W continuous rating, four poles 60W

Model		Voltage (V)	Frequency (Hz)	Current (A)	Start T. (N·m/kgf·cm)	Rated T. (N·m/kgf·cm)	Speed (rpm)	Condenser (μF)
K9I□40AJ	single-phase	100	50	0.86	0.21/2.1	0.315/3.15	1250	12
K9I□40AU			60	0.84	0.22/2.2	0.255/2.55	1550	
K9I□40AL		200	50	0.4	0.22/2.2	0.315/3.15	1250	3
K9I□40AC			60	0.41		0.255/2.55	1550	
K9I□40AD		240	50	0.38	0.24/2.4	0.315/3.15	1250	2.5
K9I□40AT			60	0.37		0.255/2.55	1550	
K9I□40AH	three-phase	200	50	0.4	0.26/2.6	0.315/3.15	1250	2.5
K9I□40AM			60	0.38		0.255/2.55	1550	
K9I□40AV		220	50	0.39	0.2/2	0.3/3	1300	2
K9I□40AQ			60	0.39		0.3/3	1300	
K9I□40AZ		230	50	0.39	0.2/2	0.3/3	1300	2
K9I□40AZ			60	0.39		0.3/3	1300	
K9I□40AZ		240	50	0.39	0.2/2	0.3/3	1300	2
K9I□40AZ			60	0.39		0.3/3	1300	
K9I□40AZ		250	50	0.39	0.2/2	0.3/3	1300	2
K9I□40AZ			60	0.39		0.3/3	1300	

Motor spec is same as induction motor's, Applied gear head is K6G□B(C) Series.
Identify rated torque of gearhead in induction motor in order to find out the torque value of gearhead per gear ratios,
* □ : SHAFT SHAPE (S : STRAIGHT, G : PINION)


OPEN TYPE MOTOR

OPEN TYPE MOTOR

60W ~200W □90mm LEAD WIRE TYPE

DIMENSIONS


K9I□60B□~K9I□200B□

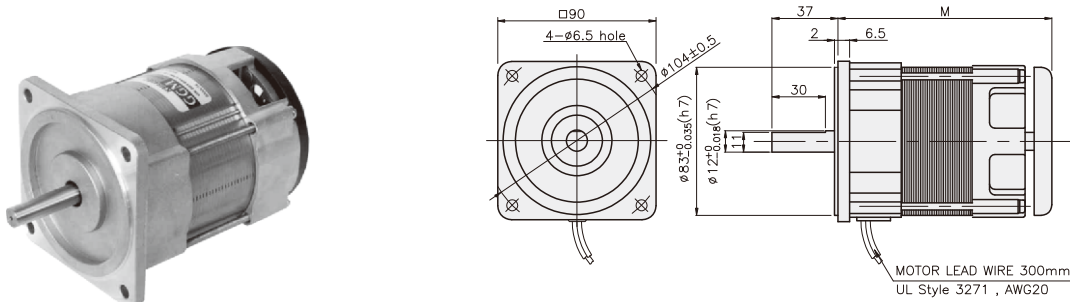

CONNECTION DIAGRAMS

DIMENSION TABLE

M	MOTOR
120	K9I□60B□
135	K9I□90B□, K9I□120B□ (60Hz)~K9I□150B□ (60Hz)
165	K9I□120B□ (50Hz)~K9I□150B□ (50Hz) K9I□180B□~K9I□200B□

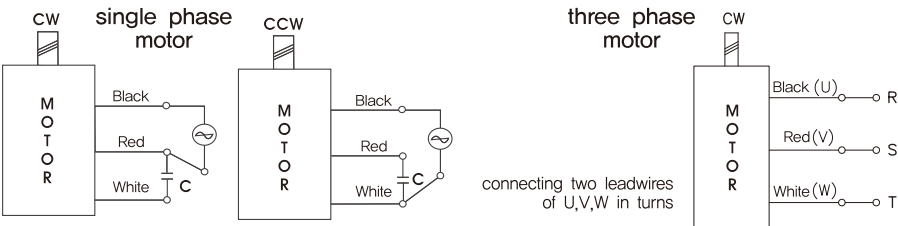

※ The direction of motor rotation is as viewed from the front shaft end of the motor

SPECIFICATIONS

60W

Model		Voltage (V)	Frequency (Hz)	Current (A)	Start T. (N·m/kgf·cm)	Rated T. (N·m/kgf·cm)	Speed (rpm)	Condenser (μF)
K9I□60BJ	single-phase	100	50	1.36	0.38/3.8	0.47/4.7	1250	20
K9I□60BU			60	1.37		0.38/3.8	1550	
K9I□60BL		200	50	0.67	0.4/4	0.47/4.7	1250	5
K9I□60BC			60	0.69		0.38/3.8	1550	
K9I□60BD		240	50	0.58	0.38/3.8	0.47/4.7	1250	4
K9I□60BT			60	0.57		0.38/3.8	1550	
K9I□60BH	three-phase	200	50	0.49	1.35/13.5	0.45/4.5	1300	—
K9I□60BH			60	0.45	1.05/10.5	0.38/3.8	1550	
K9I□60BH		220	50	0.55	1.6/16	0.435/4.35	1350	—
K9I□60BH			60	0.47	1.2/12	0.37/3.7	1600	
K9I□60BH		230	50	0.6	1.65/16.5	0.435/4.35	1350	—
K9I□60BH			60	0.52	1.3/13	0.37/3.7	1600	
K9I□60BM		380	50	0.34	1.55/15.5	0.435/4.35	1350	—
K9I□60BM			60	0.25	1.19/11.9	0.37/3.7	1600	
K9I□60BV		400	50	0.37	1.85/18.5	0.435/4.35	1350	—
K9I□60BV			60	0.28	1.42/14.2	0.37/3.7	1600	
K9I□60BQ	three-phase	415	50	0.26	1.45/14.5	0.45/4.5	1300	—
K9I□60BQ			60	0.21	1.15/11.5	0.37/3.7	1600	
K9I□60BZ		440	50	0.28	1.6/16	0.45/4.5	1300	—
K9I□60BZ			60	0.23	1.25/12.5	0.37/3.7	1600	

Motor spec is same as induction motor's, Applied gear head is K6G□B(C) Series.
Identify rated torque of gearhead in induction motor in order to find out the torque value of gearhead per gear ratios.
* □ : SHAFT SHAPE (S : STRAIGHT, G : PINION)

OPEN TYPE MOTOR

SPECIFICATIONS

90W

Model		Voltage (V)	Frequency (Hz)	Current (A)	Start T. (N·m/kgf·cm)	Rated T. (N·m/kgf·cm)	Speed (rpm)	Condenser (μF)
K9I□90BJ	single-phase	100	50	2,07	0,55/5,5	0,675/6,75	1300	30
			60	1,97		0,55/5,5	1600	
K9I□90BU		110	60	1,47	0,44/4,4	0,55/5,5	1600	20
				115	1,52			
K9I□90BL		200	50	0,75	0,5/5	0,675/6,75	1300	7
			60	0,97		0,57/5,7	1550	
K9I□90BC		220	50	0,8	0,45/4,5	0,675/6,75	1300	6
			60	0,9	0,5/5	0,57/5,7	1550	
		230	50	0,87	0,55/5,5	0,675/6,75	1300	
			60	0,93		0,57/5,7	1550	
K9I□90BD		240	50	0,85	0,5/5	0,675/6,75	1300	5
K9I□90BT	three-phase	200	50	0,79	2,25/22,5	0,65/6,5	1350	—
			60	0,72	1,75/17,5	0,55/5,5	1600	
K9I□90BH		220	50	0,72	2,35/23,5	0,65/6,5	1350	—
			60	0,63	1,8/18	0,55/5,5	1600	
		230	50	0,86	2,45/24,5	0,65/6,5	1350	
			60	0,66	1,95/19,5	0,55/5,5	1600	
K9I□90BM		380	50	0,43	2,35/23,5	0,65/6,5	1350	—
			60	0,37	1,7/17	0,55/5,5	1600	
K9I□90BV		400	50	0,52	2,65/26,5	0,65/6,5	1350	—
			60	0,45	2,1/21	0,55/5,5	1600	
K9I□90BQ		415	50	0,39	2/20	0,68/6,8	1300	—
			60	0,31	1,5/15	0,55/5,5	1600	
K9I□90BZ		440	50	0,45	2,1/21	0,68/6,8	1300	—
			60	0,39	1,7/17	0,55/5,5	1600	

120W

Model		Voltage (V)	Frequency (Hz)	Current (A)	Start T. (N·m/kgf·cm)	Rated T. (N·m/kgf·cm)	Speed (rpm)	Condenser (μF)
K9I□120BJ	single-phase	100	50	2,2	0,6/6	0,9/9	1300	35
			60		0,65/6,5	0,735/7,35	1600	
K9I□120BU		110	60	2,13	0,65/6,6	0,735/7,35	1600	30
		115		2,3	0,7/7			
K9I□120BL		200	50	1,07	0,65/6,5	0,9/9	1300	8,5
			60	1,22	0,6/6	0,755/7,55	1550	8
K9I□120BC		220	50	0,82	0,55/5,5	0,9/9	1300	6
		230		0,85	0,6/6			
		220	60	1	0,6/6	0,735/7,35	1600	7
		230		1,1	0,65/6,5			
K9I□120BD		240	50	0,9	0,6/6	0,9/9	1300	6

Motor spec is same as induction motor's, Applied gear head is K6G□B(C) Series,
Identify rated torque of gearhead in induction motor in order to find out the torque value of gearhead per gear ratios,
* □ : SHAFT SHAPE (S : STRAIGHT, G : PINION)

OPEN TYPE MOTOR

SPECIFICATIONS

150W

Model		Voltage (V)	Frequency (Hz)	Current (A)	Start T. (N·m/kgf·cm)	Rated T. (N·m/kgf·cm)	Speed (rpm)	Condenser (μF)
K9I□150BT	three-phase	200	50	1,2	3,5/35	1,13/11,3	1300	—
			60	0,95	2,65/26,5	0,915/9,15	1600	
K9I□150BH		220	50	0,99	2,95/29,5	1,13/11,3	1300	—
		230		1,1	3/30			
		220	60	0,97	2,5/25	0,915/9,15	1600	—
		230		1,02	2,7/27			
K9I□150BM		380	50	0,57	3/30	1,13/11,3	1300	—
			60		2,25/22,5	0,915/9,15	1600	
K9I□150BV		400	50	0,6	3,5/35	1,13/11,3	1300	—
			60		2,5/25	0,915/9,15	1600	
K9I□150BQ		415	50	0,57	3,15/31,5	1,13/11,3	1300	—
			60	0,42	2,35/23,5	0,915/9,15	1600	
K9I□150BZ		440	50	0,53	3,3/33	1,085/10,85	1350	—
			60	0,44	2,6/26	0,915/9,15	1600	

Motor spec is same as induction motor's, Applied gear head is K6G□B(C) Series,
Identify rated torque of gearhead in induction motor in order to find out the torque value of gearhead per gear ratios.
* □ : SHAFT SHAPE (S : STRAIGHT, G : PINION)

OPEN TYPE MOTOR

SPECIFICATIONS

180W

Model		Voltage (V)	Frequency (Hz)	Current (A)	Start T. (N·m/kgf·cm)	Rated T. (N·m/kgf·cm)	Speed (rpm)	Condenser (μF)
K9I□180BJ	single-phase	100	50	3,43	0,9/9	1,35/13,5	1300	50
			60	3,7	1/10	1,1/11	1600	
K9I□180BU		110	60	2,85	0,8/8	1,1/11	1600	35
		115		3,06				
K9I□180BL		200	50	1,47	0,73/7,3	1,35/13,5	1300	12
			60	1,43	0,65/6,5	1,1/11	1600	
K9I□180BC		220	50	1,58	0,7/7	1,35/13,5	1300	8
			60	1,38	0,65/6,5	1,1/11	1600	
		230	50	1,7	0,75/7,5	1,35/13,5	1300	
			60	1,54	0,7/7	1,1/11	1600	
K9I□180BD		240	50	1,2	0,8/8	1,35/13,5	1300	8

200W

Model		Voltage (V)	Frequency (Hz)	Current (A)	Start T. (N·m/kgf·cm)	Rated T. (N·m/kgf·cm)	Speed (rpm)	Condenser (μF)
K9I□200BT	three-phase	200	50	1,62	4/40	1,5/15	1300	—
			60	1,29	3,15/31,5	1,22/12,2	1600	
K9I□200BH		220	50	1,36	4,25/42,5	1,45/14,5	1350	—
			60	1,06	3,4/34	1,22/12,2	1600	
		230	50	1,51	4,3/43	1,45/14,5	1350	—
			60	1,15	3,5/35	1,22/12,2	1600	
K9I□200BM		380	50	0,81	4,3/43	1,45/14,5	1350	—
			60	0,58	3,6/36	1,22/12,2	1600	
K9I□200BV		400	50	0,91	4,5/45	1,45/14,5	1350	—
			60	0,67	4/40	1,22/12,2	1600	
K9I□200BQ		415	50	0,62	3,8/38	1,5/15	1300	—
			60	0,58	3/30	1,26/12,6	1550	
K9I□200BZ		440	50	0,68	4,1/41	1,5/15	1300	—
			60	0,54	3/30	1,22/12,2	1600	

Motor spec is same as induction motor's, Applied gear head is K6G□B(C) Series.
Identify rated torque of gearhead in induction motor in order to find out the torque value of gearhead per gear ratios.
* □ : SHAFT SHAPE (S : STRAIGHT, G : PINION)