


KGH-TYPE

DIMENSIONS

KGH SERIES

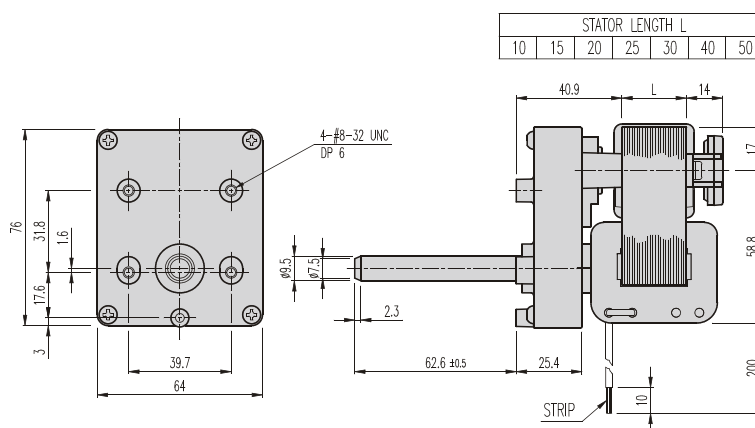

AT MAXIMUM EFFICIENCY

MODEL	KAE-6120				KAE-6130				KAE-6140				KAE-6150			
FREQ. (Hz)	50		60		50		60		50		60		50		60	
GEAR RATIO	rpm	kgf.cm	rpm	kgf.cm	rpm	kgf.cm	rpm	kgf.cm	rpm	kgf.cm	rpm	kgf.cm	rpm	kgf.cm	rpm	kgf.cm
1/15	160	0,8	193	0,7	160	1,6	193	1,2	160	2	193	1,5	160	2,5	193	1,8
1/23	104	1,2	126	1	104	2,5	126	1,8	104	3	126	2,3	104	3,9	126	2,8
1/36	67	2	81	1,6	67	3,9	81	2,9	67	4,8	81	3,6	67	6,1	81	4,5
1/58	41	2,9	50	2,6	41	6,3	50	4,6	41	7,5	50	5,8	41	9,8	50	7,2
1/75	32	4,2	39	3,3	32	8,2	39	6	32	9,9	39	7,5	32	12,8	39	9,5
1/133	18	7,4	22	5,8	18	14,5	22	10,6	18	17,6	22	13,2	18	20	22	16,9
1/220	11	11,1	13	8,6	11	20	13	15,9	11	20	13	20	11	20	13	20

* Above data is based on general type of shaded pole motor applied.

* gearbox shaft of color gear ratios is same rotation direction with motor.