


K42-TYPE

Planetary GEARHEAD

DIMENSIONS

K42-4932 BLDC SERIES

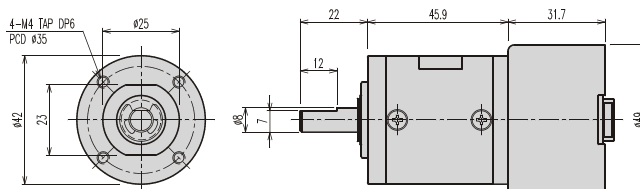

GEARHEAD LENGTH			
RATIO		L	
1/4		32.5	
1/14 ~ 1/24		39.2	
1/49 ~ 1/144		45.9	

BLDC MOTOR PERFORMANCE DATA

ITEM MODEL	VOLTAGE (DC)	NO LOAD		AT MAX. EFF.					WEIGHT (g)
		mA	rpm	gf.cm	A	rpm			
NB2-4932-050	24V	500	5000	385	1	3800			210

AT MAXIMUM EFFICIENCY (BLDC 4932 SERIES)

GEAR	MODEL	NB2-4932-050	
		DC 24V	
		rpm	kgf.cm
1/4		950	1,4
1/14		271	4,4
1/17		224	5,3
1/24		158	7,5
1/49		78	14
1/61		62	17
1/84		45	24
1/104		37	29
1/144		26	30
1/212		18	30
1/263		14	30
1/294		13	30
1/504		7,5	30
1/624		6,1	30
1/720		5,3	30
1/864		4,4	30
1/1062		3,6	30
1/1470		2,6	30
1/2500		1,52	30
1/3000		1,26	30
1/3600		1,05	30

* Gearbox output shaft rotation direction is same direction with motor.